




SMOKE ALARM

SD12

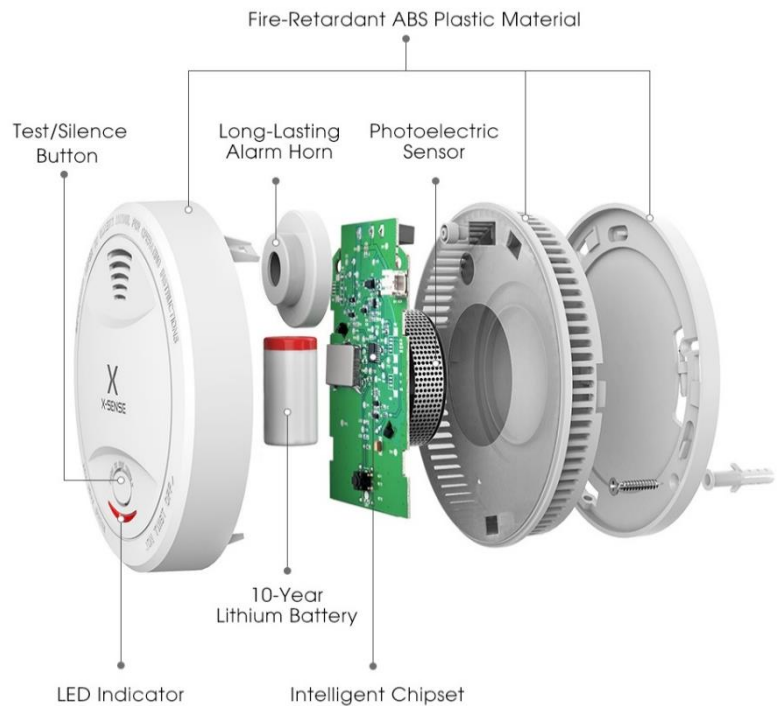

Quickly and accurately detects any dangerous smoke with a reduced number of false alarms

FEATURES

- High capacity lithium battery and low power consumption for 10 years of reliable operation
- Certified by TÜV Rheinland, global leader in independent inspection services, to meet European Standard EN 14604 for smoke detectors
- High performance STMicroelectronics microcontroller
- When battery level is low, the red LED flashes once with 1 beep every 60 seconds
- Fire retardant ABS plastic material
- Simple 2-step installation
- Mounting hardware included
- Sold as a single unit and as a 3-pack
- 5-Year Warranty

TECHNICAL SPECIFICATIONS

Power Source	10-year 3V CR123A lithium battery
Sensor Type	Photoelectric
Safety Standards	EN 14604:2005 + AC:2008
Coverage Area	20-40 m ²
Best Operating Temperature	40-100 °F (4.4-37.8 °C)
Operating Relative Humidity	≤85% RH (non-condensing)
Alarm Loudness	≥85 dB at 10 ft (3 m)
Silence Duration	≤ 9 minutes
Operating Life	10 years
Size	4.8 x 4.8 x 1.7 in (122 x 122 x 44 mm)
Weight	0.38 lb (171 g)

*Features and specifications subject to change without notice